




Sprayers. Misters. Blowers. Granulate spreaders.

SOLO – Pioneers of mobile plant protection technology

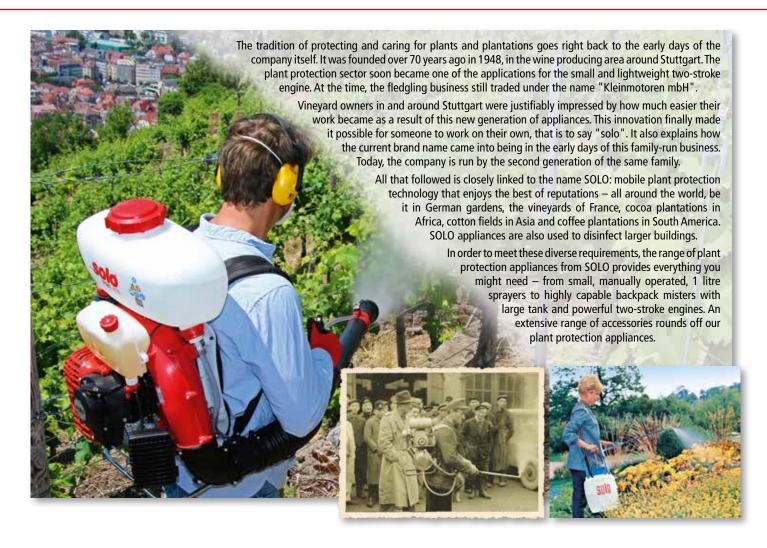

Four tips to help you choose the right product

Pressure sprayer or backpack sprayer?

The answer to this question often depends on the size of the area to be treated. If it's on the small side, a pressure sprayer with shoulder strap will suffice. For larger areas, backpack sprayers are more suitable as they are comfortable to carry and have a larger capacity. All that is left to decide is whether you want to operate the pump manually or let a battery or petrol driven unit do the work for you.

2 Tall n

Tall plants?

If you need to treat tall plants, you should use extension wands. They will help you reach the right places and apply the medium more accurately. As well as being made of plastic material, spray wands are also available in robust brass or even ultra-light carbon. The telescopic carbon spray wand, which can be extended up to 230 cm, weighs just 160 g. This protects the operator's joints even during longer working periods.

Liquid or solid?

All SOLO sprayers are designed for applying liquid media. However, the nozzles vary depending on the application: flat spray nozzles for ground spraying, hollow cone nozzles for individual plants, insecticides and fungicides. Herbicides are best applied with deflector nozzles. With solid granulate, SOLO 421 is the product of choice. It distributes the medium evenly over the required area — and can also be used in winter to apply gritting salt to pathways.

When to use a mister rather than a sprayer?

In large scale agricultural plantings, orchards, horticulture, vineyards and in many other cultivated plant stocks around the world, it is crucial for the media to successfully reach and penetrate the crops. SOLO power misters are designed to accomplish precisely this. They generate a powerful air flow which splits the plant protection medium into fine mist to cover all the required parts of the plant effectively.

Classic, Comfort or Pro...

SOLO CLASSIC

SOLO COMFORT

SOLO PRO

Whether you're an occasional user, a discerning private user or a professional, you're guaranteed to find the right product to suit your requirements in one of our three equipment lines.

It goes without saying that our CLASSIC sprayers are also of the same high quality you would expect from all SOLO products. The differences are found in the equipment features and ease of use. All backpack sprayers in the COMFORT series and above are fitted as standard with FKM seals ("Viton®") in all the important places. Moreover, the PRO backpack sprayers feature a lightweight, telescopic spray wand and are especially comfortable to wear, preventing tiredness even after prolonged periods of use.

Three battery-operated sprayers, one power sprayer and three power misters are low in weight and boast a powerful output. Whether they use electric motors, 2-stroke SOLO engines or 4-stroke Honda engines, these tools combine high levels of performance and top quality. In addition to sprayers and misters, the PRO series also features the 421 granulate spreader and the new 468 backpack blower.

SOLO – the right choice for any application

Sample a	Sample applications for SOLO sprayers and misters		408	401	461	456	424/425/435	425	475	425	416 Li	433	423
		404	409	402	462	457	473D/475	Comfort	Comfort	PRO			452
			453			458	Classic				441		
	Plants on balconies and patios			•									
ے	Private gardens, decorative plants, shrubs	•	•	•	•	•	•	•	•				
Plant protection	Large private gardens, decorative plants, shrubs, plantations				•	•	•	•	•	•	•	•	
ote	Public gardens and landscaping, greenhouses					•	•	•	•	•	•	•	
t pr	Espaliered trees, trees						•	•	•	•	•	•	•
lan	High trees											•*	
	Weed control		•		•	•	•		•	•	•		
	Agricultural plantations in general							•	•	•	•	•	•
ē	Large scale plantings, such as orchards, vineyards, plantations and horticultural operations												•
Agriculture	Plant protection					•			•	•		•	
Jrice	Disinfection												•
Ϋ́	Pest control												
Woodland	Plant care							·	•	•	•		
Woα	Protection against game attack								•	•			

*With suitable accessories

















Eliminate fungi

Eliminate pests

Care for and fertilise lawns

Care for and fertilise plants

Eliminate bacteria

Are you looking for a sprayer or foam sprayer that is specially designed for cleaning agents and disinfectants? Then ask about our **CLEANLine** sprayers.

Where can you find what you need in this catalogue?

Manual sprayers	04
Pressure sprayers	08
Trolley sprayers	08
Backpack sprayers	12
Battery-operated pressure sprayer	16
Power sprayers	22
Misters	24
Granulate spreaders	28
Blower	29

Specification	30
Spray wand accessories	32
Nozzle accessories	34
Accessories for sets of seals	35
Other accessories	36
Accessories for power sprayers	37
Accessories for misters	38
Engine oil, maintenance agents, etc.	39





MANUAL SPRAYERS

Manual sprayers are an inexpensive and indispensable aid for a variety of applications around the home.

Plants on balconies and patios, and of course decorative indoor plants too, are easy to look after with these compact devices.

Robust pumps reach the required operating pressure after just a few strokes. Once the pressure is reached, you can apply almost the entire content without additional pumping. The integral safety valve protects the appliance against excess pressure build-up.

The high quality hollow cone nozzle is fully adjustable – from a direct jet to the finest mist. The robust tanks have a large filling aperture to prevent spills when being filled and emptied. Their stable base stops them overturning when full. The underside of leaves can be optimally treated with the 401 and 402 models: the pivoting nozzle and small drift guard ensure the spray medium is only applied where actually needed.





MANUAL SPRAYERS



- 01 Sturdy pump lever
- **02** Automatic safety valve
- 03 Comfortable trigger
- **04** Large filling aperture

- Ergonomic robust handle that can also be gripped with gloves
- **06** Transparent tank with scale
- 07 Moulded feet for a firm footing
- 08 Adjustable universal nozzle

- O9 Stainless steel spray wand with adjustable, 180° pivoting universal nozzle and drift guard
- 10 High quality FKM seals ("Viton®")

MANUAL SPRAYERS

SOLO 403

Inexpensive manual pressure sprayer with nominal capacity of 1.25 l. For plant protection and care inside the house, on patios, balconies or in conservatories. 1.25 l, 2 bar, 0.5 kg



SOLO 404

As per SOLO 403, but with nominal capacity of 2 I. 2.0 l, 2 bar, 0.6 kg Part no. 40401



SOLO 401

Robust manual pressure sprayer for semi-professional activities. Equipped with high quality FKM seals ("Viton®"). The pivoting universal nozzle enables an even greater application range. 1 l, 2.5 bar, 0.4 kg

Part no. 40101



SOLO 402

As per SOLO 401, but with nominal capacity of 2 l. 2 I, 2.5 bar,

0.5 kg Part no. 40201



SOLO 460Li NEW


Forget manual pumping! Practical and inexpensive battery-operated sprayer incl. USB charging cable with 1 I nominal capacity and 2 bar pressure. For plant protection and care inside the house, on patios, balconies or



Greater reach:

For the two manual sprayers in the Comfort line, SOLO 401 and 402, a practical accessory is available in the form of a telescopic wand (49628), which can be extended from 25 to 50 cm as required. The telescopic function improves access to parts of plants that are further away or hard to reach. For example, the nozzle head can be pivoted through 180°, making it convenient and effective to treat the underside of affected leaves.



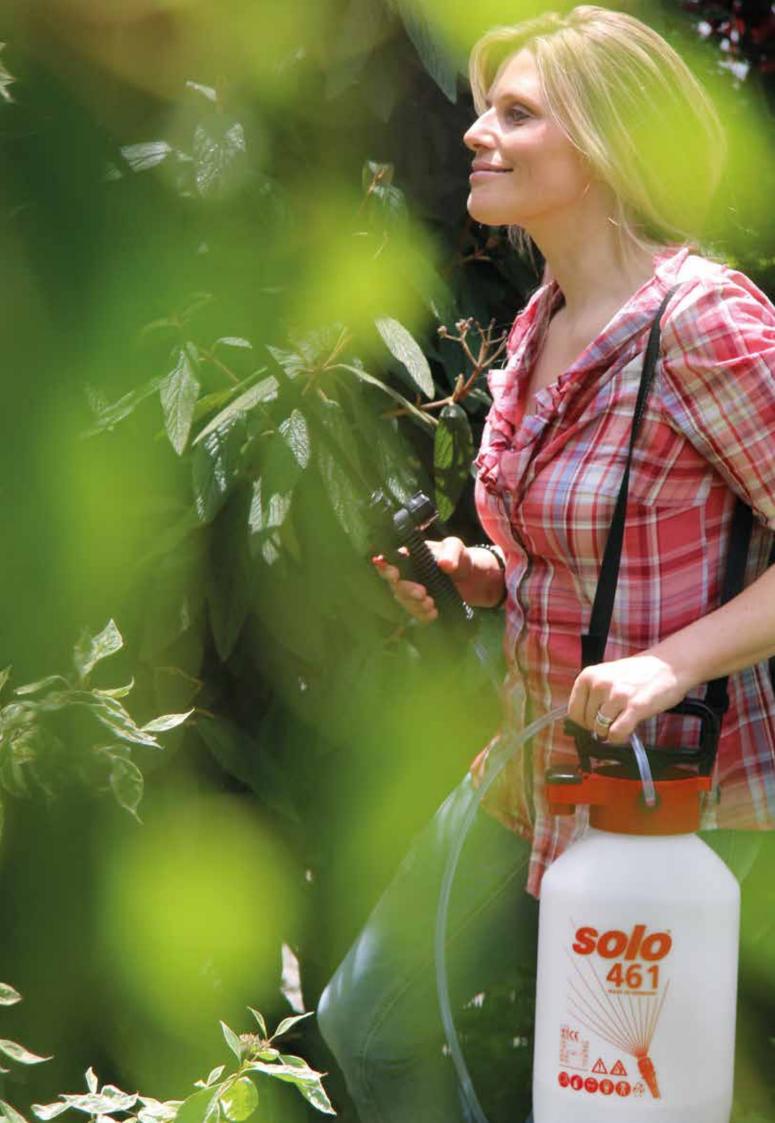



PRESSURE SPRAYERS

SOLO pressure sprayers with shoulder strap have long been popular and reliable aids in private gardens or for countryside management. They do not take up much storage space and are ready for immediate use whenever required. Various tank volumes are available, depending on the size of the garden. The 5 litre model is the most popular for garden applications. For larger areas, seven or eleven litres may be preferable.

The intensity of use also plays an important role, of course. Occasional users have the choice between the 408 and 409 entry level models, and the 461 or 462 all-rounders from the Comfort line. Use the convenient mobile 453 trolley sprayer to cover longer distances with ease between spray locations.

If the terrain is fairly rugged and the application is of a more professional nature, such as in the horticulture and landscaping sector or agriculture and forestry, we recommend the 456, 457 or 458 professional pressure sprayers. The tanks are some of the most robust on the market thanks to their wall thickness. Even an accidental tumble from their storage area or similar tough tests are no problem for these professional pressure sprayers.

With resistance to UV rays, the transparent tanks are all set for a long service life. Comprehensive accessories, such as extension wands, drift guards and different nozzles for a variety of applications make the SOLO pressure sprayers even more versatile to use.





PRESSURE SPRAYERS



- 01 High quality nozzles (408/409 adjustable universal nozzle)
- Flexible spray wand for the toughest mechanical applications
- O3 Spray wand retainer; two clips for the 456-458: for plastic and brass spray wands
- Removable top section with large aperture to facilitate filling, draining and cleaning
- O5 Safety valve automatically compensates in the case of excess pressure inside the tank
- 06 Long, broad, practical strap
- Extra large piston pump operating pressure achieved after just a few pump strokes
- O8 Stable reinforced hose with ergonomic handle
- Transparent pressure sprayer tank for good visibility of the spray medium level, made from polyethylene with UV resistance

PRESSURE SPRAYERS



SOLO 453

Plant maintenance made easy: the large wheels of the SOLO 453 trolley sprayer make it easy to pull along, facilitating work involving long distances, whether moving through a garden or transporting to site. Yet the use of aluminium for the robust handle keeps the weight right down. The dry weight is a mere 3.5 kg. Just a few pump strokes are enough to build the necessary pressure inside the 11 I tank. The pump handle is large and robust enough to be securely gripped with gloves. The same applies to the tank handle with its soft grip sleeve. A 2.5 m spiral hose provides the necessary reach.

Piston pump, 11 I, 3.5 kg Part no. 45301

SOLO 461

An indispensable aid in many private gardens for plant protection, treating weeds and applying insecticide. Stable 5 I tank, 50 cm spray wand and SOLO flat spray and hollow cone nozzle. Piston pump, 5 l, 1.5 kg Part no. 46101



SOLO 462

As per SOLO 461, but with nominal capacity of 7 I. Piston pump, 7 l, 1.7 kg Part no. 46201

SOLO 456

to store nozzles

The cream of the crop amongst pressure sprayers, with top performance even in tough, continuous use. Extremely stable 5 I tank,

unbreakable 50 cm plastic spray wand and SOLO flat spray and hollow cone nozzle. Piston pump, 5 l,

2.6 kg Part no. 45601



SOLO 457

nominal capacity of 7 l. Piston pump, 7 l, 2.8 kg Part no. 45701



Optional accessories: compressed air supply valve to build pressure without having to pump manually. Part no. 49590



SOLO 458

As per SOLO 456, but with nominal capacity of 11 I and stable base Piston pump, 11 l, 2.9 kg

Part no. 45802



Accessories: Practical wheel set, comprising large, high traction wheels incl. axle and a handle for easy tilting and movement.

Part no. 49211







BACKPACK SPRAYERS

When it comes to plastic backpack sprayers, we have decades of experience, having started producing full plastic sprayers back in 1960.

The lightness of the material on the one hand and its durability on the other are just two good reasons to choose SOLO backpack sprayers.

Starting with the Comfort models, the backpack sprayers are also equipped with highly resistant FKM seals ("Viton®") for applying aggressive liquids. There are four pressure settings so you can apply precise quantities.

With abrasive fluids, the 473 D and 475 sprayer models with diaphragm pump are the ideal choice. The special Tivilon® diaphragm in their pumps is highly resistant.

With either piston or diaphragm, the pumps in the SOLO backpack sprayers are some of the most effortless and efficient

on the market. Longer operating times are therefore simple to achieve, thanks also to the exceptional straps, inspired by the outdoor sports sector on the 425 PRO models. Comfortable and padded, they can be adjusted in various ways for a perfect fit – also available as accessories.

The UV-resistant tanks come in three sizes: 10, 15 or 20 litres. They are translucent so the fill level is easily visible. The tank is filled and drained through a large filler neck. For convenient transport, the Comfort and Pro models with 15 litre tank feature a carrying handle with built-in spray wand retainer.

See page 32 onwards for our extensive range of accessories. These can be used to further extend the application options of these highly resilient sprayers.



BACKPACK SPRAYERS



- Impressive spray performance; two nozzles supplied as standard
- Ergonomically refined, rotating, length-adjustable pump lever (Comfort/Pro), individual pump lever mounting for right/left-handed users
- Wide, comfortably padded straps with strain 03 relief; Pro models with special backpack carrying system
- 04 Large filling and cleaning aperture

- Carrying handle with spray wand retainer (Comfort/Pro)
- Ergonomic tank design:
 High quality plastic material resistant to
 - Non-pressurised tank with separate air chamber
 - Fill level markings
 - Low inherent weight
 - Clearly visible spray medium level
- Resistant FKM seals ("Viton®") for all permissible spray liquids (Comfort/Pro)

- High grip manual valve with pressure gauge connection for precisely metered spray volume
- Long reinforced hose for extended reach
- Effective, smooth-running pump 4 manual spray pressure settings (Comfort/Pro)
- 11 Stable tank frame

BACKPACK SPRAYERS

SOLO **NOVA** 424

Inexpensive. Practical. Unique.
Sophisticated. Four attributes that best describe the new SOLO NOVA 424 backpack sprayer. Pump lever can be fitted on the right or left side.

16 I. 5.1 kg. 4 har



SOLO 425 CLASSIC

A true all-rounder, proven millions of times over, for plant protection applications. Simple, easy to service and robust design. Pump lever can be fitted on the right or left side.

Piston pump, 15 l, 4.4 kg
Part no. 42521

SOLO 435 CLASSIC

Identical to 425 CLASSIC, but with nominal capacity of 20 I.



SOLO 473D CLASSIC

Sprayer with nominal capacity of 10 l and diaphragm pump for applying abrasive fluids. Pump lever can be fitted on the right or left side

Diaphragm pump, 10 l, 4.2 kg Part no. 47321



SOLO 475 CLASSIC

A classic with nominal capacity of 15 l and diaphragm pump. For abrasive fluids. Diaphragm pump, 15 l, 4.6 kg Part no. 47521



SOLO 425 COMFORT

Better equipped for greater comfort: fully adjustable pump lever for ergonomic operation and practical carrying handle with integral spray wand retainer. In addition, the pressure can be switched to one of four settings. Piston pump, 15 l, 4.5 kg Part no. 42531



SOLO 475 COMFORT

The diaphragm pump model is generally used in conjunction with relatively viscous herbicides in the low pressure range.

Diaphragm pump, 15 l, 4.7 kg

Part no. 47531



SOLO 425 **PRO**

The ultimate backpack sprayer. Professional carrying system, telescopic spray wand with high quality brass nozzles and pressure gauge are standard features with this model. Piston pump, 15 I, 5.2 kg Part no. 42541



Backpack sprayers don't come better than this

The SOLO 425 PRO professional model, with its premium features, is designed specifically for professional users. Those who work long hours with a backpack sprayer on a daily basis will appreciate the comfortable and fully adjustable backpack carrying system, inspired by the outdoor sports sector, which has been optimised for maximum user comfort.

The spray wand and nozzles of this sprayer also meet the needs of professionals: the ultra-light telescopic carbon spray wand can be adjusted between 50 cm and 90 cm. Standard delivery includes high quality brass nozzles: flat spray and hollow cone (adjustable).









BATTERY-OPERATED SPRAYERS

The 441, 417 and 416 Li battery-operated sprayers from SOLO are whisper-quiet and free of emissions. With their powerful electric drives, they are the ideal choice when it comes to plant protection in enclosed spaces with large areas requiring treatment. Efficient working practices and high performance are called for in conservatories and greenhouses, too. Of course, these battery-operated sprayers also perform well outdoors. With one press of the Power button, the powerful pump is barely noticeable but for a quiet humming sound.

The entry level battery-operated sprayer is the new SOLO 441, which is based on the current design line as seen in the NOVA 424. The new SOLO 441 is the right choice for occasional work in the garden or in enclosed spaces.

The 416 Li and 417 models offer a higher equipment level and greater comfort. Two power settings are available to the user and the standard pressure gauge helps you apply the correct quantity. Even at the second power setting, the sound emissions are hardly any more audible. This ensures a pleasant working environment without the need for ear protectors.

These two power settings regulate the pressure range of the powerful 12 V pumps to up to 4.3 bar. When the battery runs out, it can be quickly recharged inside the appliance.

Compared to the lead gel battery in the 417, the 416 Li has a lithium-ion battery, and a capacity of 20 rather than 18 litres. Last but not least, the sprayers include a lightweight, 50 to 90 cm telescopic wand made from carbon.







BATTERY-OPERATED BACKPACK SPRAYER 441

The new SOLO 441 is the entry level model for battery-operated plant protection equipment. This robust, lightweight product is equipped with a rechargeable lithium-ion battery that provides up to 170 minutes of continuous operation and can be recharged in just two hours. The powerful and durable electric pump delivers 2.5 bar operating pressure. The splash-protected switch is located at the top of the appliance and is easy to operate. The compact battery is easily accessible from the outside and can be removed without difficulty for recharging with the external charger. To prevent contamination of the terminals, a spring keeps the cover of the battery compartment closed.

The tank and base are designed to suit the anatomy of the human spine. Together with the padded shoulder straps, this makes the sprayer significantly more comfortable to wear. These are important features for increased operator comfort and work safety.

Save yourself the hard work of pumping with the new SOLO 441 — an inexpensive introduction to our range of high quality, battery-operated sprayers.



- 01 Large filling and cleaning aperture
- O2 Centrally located, enclosed electric pump
- 03 Handle
- 04 Adjustable universal nozzle
- Easy battery removal and easily accessible, protected control switch

- 06 3-way strap height adjustment
- 07 Charger and lithium-ion battery included
- 08 Stable, secure base

Lithium-ion battery 11.1 V/2.5 Ah 16 I, 3.7 kg, 2.5 bar Part no. 44101

BATTERY-OPERATED SPRAYERS



- **01** 1.5 m long reinforced hose
- Robust manual valve with vibration-dampened pressure gauge
- 03 Seals resistant to all approved spray liquids
- Large filling and cleaning aperture (with quick-action closure on the 416 Li)
- 05 Integrated tank fill level scale
- 06 Ergonomically shaped tank made from UV-resistant plastic material with comfortable padded backpack frame, wide shoulder straps and waist strap (416 Li)
- 07 Almost unbreakable plastic spray wand (417) or carbon telescopic spray wand (416 Li)
- Robust electric pump in impact-resistant enclosure; two settings for pressure and spray volume
- 09 Flat spray nozzle 03-F80, compliant with ISO standard (with ball valve filter for the 416 Li)
- Powerful, maintenance-free battery 416 Li model: lithium-ion battery

BATTERY-OPERATED SPRAYERS

SOLO 417

The powerful lead gel battery in the SOLO 417 provides up to 3.7 hours of operation and takes 8 hours to recharge. The lightweight, transparent plastic tank can hold 18 l. A 50 cm plastic spray wand with high quality nozzle and pressure gauge are included as standard. Lead gel battery 12 V/7.2 Ah, 18 l, 7.6 kg Part no. 41701

SOLO 416 Li

For professional use in commercial nurseries and greenhouses, or for everyday horticulture and landscaping tasks. The powerful lithium-ion battery ensures up to 5.9 hours of continuous operation and recharges in just 5.5 hours.

Additional features of the 416 Li:

- + Heavy duty lithium-ion battery
- with up to 5.9 h runtime + Large tank lid with quick-acting closure
- + Removable stainless steel filling strainer
- + 50 90 cm telescopic carbon spray wand
- + Space saving vertical spray wand retainer
- + Low inherent weight Lithium-ion battery 11.1 V/7.8 Ah, 20 l, 5.2 kg Part no. 41601



Expand your options - with the right accessories from SOLO

Reach greater heights comfortably with a longer spray wand, available in plastic, brass or even ultra-lightweight carbon versions. The latter has a reach of up to 230 cm. Choosing the right nozzle is also important. The flat spray nozzle is the first choice for treating large areas, whereas herbicide can be applied with pinpoint accuracy using deflector or full cone nozzles, plus drift guards to







POWER SPRAYER

Our 433 power sprayer is characterised by its high efficiency over larger areas. This combination is applicable for very tall plantings such as trees and large shrubs, areas containing crops, or in professional horticulture and landscaping.

The power is supplied by a 4-stroke HONDA engine, which has special bearings to protect against vibrations, as well as being easy to start and simple to service. The controllable operating pressure of the push-pull piston pump reaches up to 30 bar. Long working stretches without refilling are ensured by the nominal capacity of 20 litres.

A practical drain connector underneath the tank enables complete draining of any leftover liquid. The SOLO 433 is equipped with a 50 cm stainless steel spray wand and a pressure gauge on the sturdy manual valve, which allows the pressure to be adjusted for any application. Supplied with a high quality twin nozzle, with stainless steel nozzle discs. With the correct accessories (see page 37), you can discover the versatility and all the advantages of this power pressure sprayer. For example, increase the reach with the proper spray wand. Or adjust the spray pattern with the



- 01 Twin nozzle
- 02 50 cm stainless steel spray wand
- 03 Large filling and cleaning aperture
- 04 Spray wand retainer
- Ergonomically designed tank made from transparent, UV-resistant plastic material with comfortable, padded backpack frame and wide shoulder straps
- Robust manual valve with siliconedampened pressure gauge. Hose connection with swivel coupling for flexible operation.
- 07 Powerful 4-stroke HONDA engine
- 08 Anti-vibration dampers
- O9 Long high pressure hose for stress-free arm movements



MISTERS



SOLO misters are amongst the most popular in the world. They are right at home and have become indispensable in agriculture, horticulture, woodland maintenance, public parks and green areas, amongst fruit and vine growers and in coffee and cocoa plantations in Africa and South America. The success of SOLO misters is based on their high spray performance combined with low weight. These characteristics make them the environmentally responsible choice for the economical protection of all crops and plantings anywhere in the world. Furthermore, SOLO misters are remarkably robust and easy to handle. Thanks to all these benefits, they have been helping to bring about high yields around the globe for many years. In this, advanced engine technology from SOLO ensures

low fuel consumption, reduced exhaust gas emissions and high performance over long periods — even under adverse warm conditions.

In addition to plant protection, these sprayers can also be used for disinfection and parasite control in the fields of logistics, agriculture and animal husbandry.

The range of accessories (see page 38) makes both SOLO misters — the new, inexpensive MASTER 452 and the powerful, proven PORT 423 — even more versatile.

For example, a dusting attachment turns the PORT 423 into a brilliant dusting machine. A liquid booster pump ensures uniform application when spraying upwards and when using longer spray wands. The practical twin nozzle makes it possible to treat two rows at the same time.





MISTERS



- 01 Large filling and cleaning aperture
- **02** Extended reach through high air expulsion velocity
- 03 High volume tank made from UV-resistant plastic. Fill level always readable through translucent tank wall
- Ergonomically designed control for throttle, spray volume and start/stop
- Large petrol tank together with a frugal 2-stroke SOLO engine ensure long working cycles
- O6 Comfortable, ergonomically shaped backpack frame with padded straps and anti-vibration dampers
- **07** Designed for easy maintenance

- 08 Fan housing made from highly resilient plastic
- Long rotating plastic spray wand, can be pivoted effortlessly in any direction
- Advanced, low-emission 2-stroke SOLO engine with specially coated cylinder for a long service life of the appliances

SOLO MASTER 452 (121) NEW

Powerful mister with quiet 66.5 cm³ 2-stroke SOLO engine. Advanced engine technology ensures low noise and exhaust gas emissions.

A diaphragm carburettor and comfortable backpack carrying system ensure comfortable operating conditions at all times.

One of the lightest and most compact in its class – worldwide.

66.5 cm³, 2.1 kW/2.9 hp, 1400 m³/h, 12 l,

One has (15201) (15201)

9.6 kg (45201) / 9.7 kg (45203) Part no. 45201 • 45203 (EU)



SOLO MASTER 452 (151) NEW As per the 45201, but with 15 I tank capacity. 66.5 cm³, 2.1 kW/2.9 hp, 1400 m³/h, 15 I, 9.7 kg Part no. 45202 • (not available in the EU)

SOLO PORT 423

Throughout the world, the SOLO PORT 423 is the epitome of a robust and reliable mister. The powerful 72.3 cm³ 2-stroke SOLO engine delivers 3 kW. This durable mister has proven easy to service over many years.

72.3 cm³, 3.0 kW/4.1 hp, 1400 m³/h, 10 l, 11 kg Part no. 42311 • (not available in the EU) The right nozzle for any crop:

The standard delivery includes a long reach nozzle as well as a wide spray grille and a nozzle with interchangeable deflectors.

The long reach nozzle directs the spray medium over a distance of up to 12 metres (PORT 423). The spray width increases with the wide spray grille. The nozzle with single sided deflector makes it easier to spray rows of crops and also enables you to reach underneath leaves. The double sided deflector allows you to efficiently treat two rows at a time.





GRANULATE SPREADERS



Seed, fertiliser, e.g. after scarifying, gritting salt, oil absorbers, cleaning agents, pelletised lime, bird seed, stock feed, sand ... The SOLO granulate spreader 421 is designed to be used all year round. A manual crank drives the rotating spreader disc to guarantee precise distribution of the granulate onto the area to be treated. The integral agitator ensures that the material in the tank is mixed thoroughly. Up to 9 litres of granulated matter can be applied where specifically required, even on difficult terrain – for example where a wheeled appliance would be unsuitable. The direction in which the material is spread can be adjusted just as easily as the delivery rate.

The spreader is carried in front of the body by means of an adjustable strap. The large filling aperture makes filling easy, whilst the large screw top protects users from harmful dust.

- 01 Large filling and cleaning aperture with tightly fitting dust cap prevents the ingress of dust
- 02 Padded shoulder strap
- 03 Large 9 l tank

- 04 Smooth-running manual crank drive
- 05 Robust integral agitator: Hermetically sealed, gearbox with angular metal gears
- O6 Spreader disc with large fins for even application

Also suitable for winter grit (salt, etc.)

9 l, 2.5 kg • Part no. 42101





Adjustable distribution direction (1), agitator (2)



Enclosed worm drive with angular metal gears




Comfortable strap



Secure base and ergonomic moulding

BLOWER

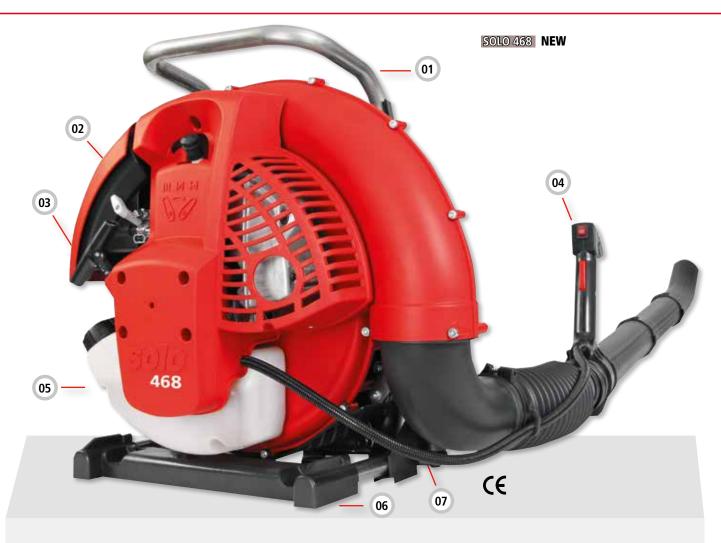

- 01 Robust carrying handle
- O2 Clean combustion engine with aluminium crankcase
- 03 Large starter handle
- **04** Single hand operating handle

- Fuel tank made from transparent, sturdy plastic, making the fill level easily visible
- 06 Stable base
- Anti-vibration system effectively reduces vibrations at body contact points Padded back support

66.5 cm³, 2.1 kW/2.9 hp, 1400 m³/h, 8.4 kg Part no. 46801 The new, compact SOLO 468 blower combines very low weight with high performance, low consumption and low emissions. The SOLO 468 is characterised in particular by its high blower output, taking into account the interests of the environment and the immediate surroundings. Last but not least, the price/performance ratio is one of the most convincing selling points of this new SOLO 468 blower.



SPECIFICATION











Model	403	404	401	402	460 Li
Part no.	40301	40401	40101	40201	46001
Battery	-	-	-	-	3.7 V / 1.4 Ah
Piston pump	•	•	•	•	•
Nominal capacity I	1.25	2.0	1.0	2.0	1.0
Spray pressure bar max.	2	2	2.5	2.5	-
Safety valve	•	•	•	•	-
Dry weight kg	0.5	0.6	0.4	0.5	0.3





			7	,		- American	B 100	
Model	408	409	461	462	456	457	458	
Part no.	40801	40901	46101	46201	45601	45701	45802	
Piston pump	•	•	•	•	•	•	•	
Nominal capacity I	5.0	7.0	5.0	7.0	5.0	7.0	11.0	
Spray pressure bar max.	2	.0	3	.0		3.0		
Dry weight kg	1.2	1.4	1.5	1.7	2.6	2.8	2.9	
Spray wand can be secured	•	•	•	•	•	•	•	
Hose length m	1.	1.2		1.4		1.4 m reinforced hose		
Spray wand	Plastic,	, 40 cm	Plastic, 50 cm		Plastic, 50 cm			
Shoulder strap	Ye	es	Yes		Yes			
Nozzle		ersal hollow e, adjustable		spray and one nozzle	SOLO flat spray and hollow cone nozzle			

Model Part no.	453 45301
Piston pump	•
Nominal capacity I	11
Spray pressure bar max.	2
Dry weight kg	3.5
Transport wheels	Yes
Hose length m	2.5 (spiral hose)
Spray wand	Plastic, 40 cm
Nozzle	SOLO universal hollow cone nozzle, adjustable



Model Part no.	NOVA 424 42422	473 D Classic 47321	425 Classic 42521	435 Classic 43521	475 Classic 47521	425 Comfort 42531	475 Comfort 47531	425 Pro 42541
Pump type piston/diaphragm	• /-	-/ ●	• /-	• /-	-/ ●	• /-	-/ ●	• /-
Nominal capacity I	16	10	15	20	15	15	15	15
Max. spray pressure bar	4	4	4	4	4	4/6*	4	4/6*
Spray wand length cm	50	50	50	50	50	50	50	50 - 90, adjustable
Manual spray pressure adjustment	-	-	-	-	-	•	•	•
Pump lever adjustable	-	-	-	-	-	•	•	•
FKM seals ("Viton®")	-	-	-	-	-	•	•	•
Telescopic carbon spray wand	-	-	-	-	-	-	-	•
Pressure gauge	-	-	-	-	-	-	-	•
Dry weight kg	5,1	4,2	4,4	5,0	4,6	4,5	4,7	5,2

^{*} With plugs

SPECIFICATION









Model	441	417	416 Li
Part no.	44101	41701	41601
Rechargeable battery	Lithium-ion	Lead gel	Lithium-ion
Capacity V/Ah	11.1 / 7.8	12 / 7.2	11.1 / 7.8
Nominal capacity I	16	18	20
Nozzle	1 / 2.5	1 / 2.5	1 / 2.5
Spray pressure settings / bar	1 / 2.5	2 / 2.5; 4.3	2 / 2.5; 4.3
Flow rate I/min with standard nozzle	0.6-1.16 -	I 1.07 II 1.42	I 1.07 II 1.42
Operating time h	2.9	l: 3.7 ; l l: 2.3	I: 5.9 ; I I: 3.7
Charging time h	approx. 2	approx. 8	approx. 5.5
Dry weight kg	5.2	7.6	5.2
Spray wand	Plastic, 50 cm	Plastic, 50 cm	Adjustable, 50 - 90 cm, carbon
Standard delivery	Battery, charger	Battery, charger, pressure gauge	Battery, charger, pressure gauge, waist belt
Sound pressure level dB(A)(1)	< 70	< 70	< 70
Sound power level guaranteed dB(A) ⁽¹⁾	< 70	< 70	< 70
Vibration value m/s ^{2 (2)}	≤2.0	≤ 2.0	≤2.0

Model Part no.	433 43303
Engine	4-stroke Honda GX 25
Capacity cm ³	25
Nominal capacity I	20
Stainless steel twin nozzle	•
Max. adjustable spray pressure bar	up to 30
Spray volume I/min with standard nozzle	1.0 at 5 bar 1.5 at 10 bar 2.0 at 20 bar 2.4 at 30 bar
Dry weight kg	9.8
Pressure gauge	•
Standard delivery	Stainless steel spray wand
Sound pressure level dB(A)(1)	82
Sound power level dB(A)(1)	95
Vibration value m/s ^{2 (2)}	≤ 2.0







Model Part no.	MASTER 452 45201 / 45203 (EU)	MASTER 452-02 45202**	PORT 423 42311**
Engine	2-stroke SOLO	2-stroke SOLO	2-stroke SOLO
Capacity cm ³	66.5	66.5	72.3
Power kW/hp	2.1 / 2.9	2.1 / 2.9	3.0 / 4.1
Decompression valve	•	•	-
Tank capacity (nominal) I	12 (10)	15 (13)	12 (10)
Air flow rate max. m³/h*	1400	1400	1400
Horizontal reach in m	11.0	11.0	12
Dry weight kg	9.6 (45201) / 9.7 (45203)	9.7	11.0
Standard delivery	SOLO special misting nozzle with	4 settings, long reach nozzle, wide spray grille, single	e sided and double sided deflector
Sound pressure level dB(A)(1)	97	97	97
Sound power level L _{WAeq} dB(A) ⁽¹⁾	106	106	110
Vibration value m/s ^{2 (2)}	≤ 2.5	≤ 2.5	≤ 6.3

^{*}Excl. blower ** Not for the EU





Model	468
Part number	46801
Engine	2-stroke SOLO
Capacity cm ³	66.5
Decompression valve	•
Max. fan performance rate m³/h*	1400
Air velocity m/s	92
Anti-vibration system	•
Weight kg	8.4
Sound pressure level dB(A)(1)	97
Sound power level guaranteed dB(A)(2)	106
Vibration value m/s ²	≤ 2.5


Model	421
Part no.	42101
Fill capacity l	9
Tank filling aperture diameter cm	14.5
Dry weight kg	2.5
Dimensions excl. crank W x D x H, cm	29 x 26 x 49
Distribution range subject to material, cm	Granulate approx. 300 - 400 Grass seed approx. 180 - 200
Distribution width subject to material, cm	Granulate approx. 180 - 200 Grass seed approx. 150 - 170
Gearbox	Hermetically sealed worm drive with angular metal gears
Transmission ratio	1 · 7 5

^{*}Excl. blower ** Not for the EU

Spray wands for pressure and backpack sprayers

•	Recommer	nded	•	Suitable	•	Not red	comme	nded] -		Unsuita	ble / do	oes not	fit
Pos.	Designation	Description a	nd recom	mended application	Part no.		403 404	408 409 453	401 402	461 462	456 457 458	424 425 435	473 D 475	416 Li 417 441
1	Telescopic wand 25 - 50 cm	to up to 50 cr small drift gu to reach parts concealed. For through 180°, the underside consists of a pl	n, with ad ard. The te of plants example, making it of affecte astic, impa	can be continuously extended justable universal nozzle and elescopic function makes it easier that are further away or the nozzle head can be pivoted convenient and effective to treat ed leaves. The telescopic wand ct-resistant, profiled outer tube stainless steel inner tube.			-	-	•	-	-	-	-	-
2	Spray wand 50 cm with flat spray nozzle	head, high gra union nut for a is flexible and a plastic material	ade flat sp attachment almost unl that can v	m, including angled nozzle oray nozzle, filter strainer and to the manual valve. Spray wand oreakable thanks to high quality withstand extreme loads. Suitable plant protection applications.	49439		-	•	•	•	•	•	•	441:
3	Extension wand 50 cm	that simply re connection nut SOLO spray was sprayers with a	equire an t with seal ands, for po a nominal thanks to	nsion wand for all applications extended reach. It includes a ring to attach to all standard ressure sprayers and backpack capacity of 5 I or more. Almost high quality plastic material that bads.			-	•	-	•	•	•	•	•
4	Brass spray wand, 50 cm	applications of the also recommendates societies societi	that requi mend it fo uch as sp oray wand lete with t	nsive and professional ire robust, rigid spray wands. or working with SOLO ray booms or drift guards. The has a diameter of 8 mm and is union nut for attachment to the	49519		-	•	-	•	•	•	•	•
5	Universal spray wand, 50 cm		anufacture	pack sprayers from SOLO and rs. Including adjustable universa zle.	49610		-	•	-	•	•	•	•	•
6	Brass spray wand, 75 cm	that require r	r <mark>obust, rig</mark> nd can be	nd professional applications yid spray wands. The 75 cm optimally supplemented with s drift guards.	49428		-	•	-	•	•	•	•	•
7	Brass telescopic spray wand 57 - 100 cm	extendable to in any position challenging on extended reac recommended guards. The tel	any lengt n. It can be r commerc h or to tre I for work escopic spr	ic spray wand made from brass is h up to 100 cm and lockable put to various uses in any ial application, to enable an eat ground level areas. Also ing with spray booms or drift ay wand is supplied complete with to the SOLO manual valve.	49478		-		-	•	•	•	•	•
8	Brass tree spray wand, 150 cm	applications t extended read plants, e.g. for The brass tube	hat requir ch. We also spraying e consists of diameter, in	is ideal for all challenging e a robust, rigid wand with an recommend it for treating talle spaliered trees or bushes. two 75 cm threaded spray wands cluding two union nuts and seals			-	•		•	•	•	•	•
9	Carbon tree spray wand 120 cm	weighs just 10 applications th wands – even low weight, it poor for longer wor nut for attachme	O g. It can I nat require with an ex rotects the king perio ent to the S	d made from carbon fibre material be used for all challenging rigid and extremely lightweight tended reach. Thanks to its very operator's joints and is suitable ds. Supplied complete with union OLO manual valve.			-	•	-	•	•	•	•	•
10	Carbon telescopic spray wand 60 - 120 cm	ultra-light car recommend this that require a with adjustab working with guards. Long w wrists are no pr	bon fibre s version for rigid and le reach. It accessorie vorking per roblem. The	copic spray wand made from material weighs just 95 g. We or all challenging applications extremely lightweight wand it is also recommended for es such as spray booms or drift iods with minimal strain on the standard delivery includes the to the SOLO manual valve.	49457		-	•	-			•		•

Pos.	Designation	Description and recommended application	Part no.	403 404	408 409 453	401 402	461 462	456 457 458	424 425 435	473 D 475	416 Li 417 441
11	Carbon telescopic spray wand 120 - 230 cm	The telescopic spray wand made from ultra-light carbon fibre material weighs just 160 g and is continuously adjustable in length from 120 - 230 cm. It can be used for all challenging applications that require rigid and extremely lightweight wands with a very long reach. The low weight greatly facilitates the work and protects the operator's joints, enabling long periods of use. Supplied complete with union nut for attachment to the SOLO manual valve.	49445	-	•	-	•	•	•	•	•
	Spray wand extension, flexible, 15 cm	Flexible and ideally suitable for treating inaccessible areas and places that are not easily visible or are difficult to reach, including use in pest control, for example. With the pliable spray wand section that can be bent by up to 180°, the jet can be sprayed in any direction. Including connection nut for fastening to an existing spray wand end piece, without nozzles. Can be combined with all SOLO spray wands and spray nozzles; the union nut for attachment is included.	49450	-	•	-	•	•	•	•	•
13	Flexible double spray head 60 cm	The double spray head has many possible applications, e.g. for treating a plant or row of plants from two sides at once, or for spraying two rows at the same time. With its twin nozzles, it can be used for treating single plants and to apply repellent spray to protect against browsing animals. With its two flexible spray wands, the double spray head has a total operating width of 60 cm. It comes complete with nuts to connect to each spray wand, preinstalled hollow cone spray nozzles and two further sizes of hollow cone nozzle. Other types of nozzle in different sizes can also be fitted if preferred.	49411	-	•	-	•	•	•	•	441:
14	Spray boom 60 cm	The 60 cm wide spray boom has two preinstalled flat spray nozzles and is ideal for treating two rows or spraying large areas. Made from special, almost unbreakable plastic material, supplied with two ball valve nozzle filters to prevent dripping and a union nut for attachment to an existing spray wand. We recommend combining it with the SOLO short, rigid, brass or carbon fibre spray wands.	49514		•	-	•	•	•	•	441:
15	Aluminium spray boom 120 cm	For treating larger areas, we recommend twice the spraying width with the 120 cm wide, light, aluminium spray boom. Four flat spray nozzles and four ball valve nozzle filters to prevent dripping are preinstalled. It can be ideally combined with the SOLO short, rigid, brass or carbon fibre spray wands. The union nut for attachment to the spray wand is provided.	49299	-	•	-	•	•	•	•	•

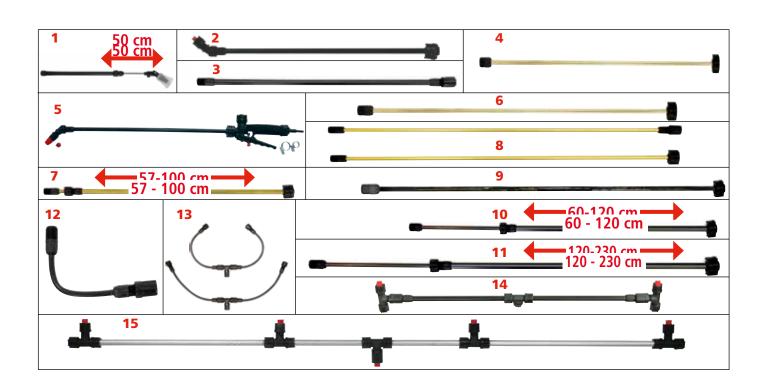

Nozzles and drift guards for pressure and backpack sprayers

•	Recommer	nded	•	Suitable	•	Not reco	ecommended -				Unsuitable / does not fi			
Pos	Designation	Description a	and recom	mended application	Part no.		403 404	408 409 453	401 402	461 462	456 457 458	424 425 435	473 D 475	416 Li 417 441
1	Full nozzle set	application a different, high hollow cone Four flat spra spraying rows. 015, 02, 03 an Two deflecto herbicides: for the low pressuribbon-like spr DT 1.0 and DT Three hollow shrubs and directions, es The three mate 1.4 and 1.8 mirequired swirl	reas. The h grade f nozzles. Ay nozzles with a rib d 04. r nozzles or treating are range vay pattern 2.5. r cone nozer pecially f ching nozzm, and are plate. includes a	or all the most important set contains a total of nine lat spray, deflector and for treating large areas and bon-like spray pattern in sizes especially for applying large areas and working in with a coarse droplet size and . The nozzles come in sizes excles for treating single plants, plantings that extend in all or insecticides and fungicides. The caps have hole sizes of 1.0, used in combination with the nozzle head with preinstalled			-	•	-	•	•	•	•	•
2	Universal plastic nozzle, adjustable	is especially su can be adjuste	iitable whe d from fi n	e nozzle made from plastic n treating single plants. It e droplets with a hollow tern, right through to a	49525		-	•	-	•	•	•	•	•
3	Universal nozzle, brass, adjustable	especially suita extend in all	able when directions	e nozzle made from brass is treating single plants that . It can be variably adjusted from ugh to a point jet.	49206		-	•	-	•	•	•	•	•
4	Oval drift guard 30 x 11.5 cm	The oval plasti herbicide ove spraying in e fine droplets areas contain equipped with spray pattern the umbrella s section has be visibility of ti recommend co or short telesc	49430		-	•	-	•	•	•	•	•		
5	Round drift guard Ø 15 cm	protection for and for use o full cone noza The guard effe prevent fine o adjacent area The round drift	targeted, in various zle ensure ctively rest droplets u as contain t guard is a	d drift guard with UV light accurate herbicide application smaller plots. Its preinstalled s a circular spray pattern. ricts the spraying range to help nintentionally drifting into ing crops or bodies of water. Iso made from transparent, num visibility of the area to be	49580		-	•	-	•	•	•	•	•

Pos.	Designation	Description and recomn	nended application	Part no.		403 404	408 409 453	401 402	461 462	456 457 458	424 425 435	473 D 475	416 Li 417 441
6	Dual nozzle with nozzle set	for a diverse range of appli telescopic or extension wand rows of plants at once or s the underside of leaves or of the nozzle heads can be The standard delivery inclu cone nozzles for large scal nozzles for treating large a plugs to allow one nozzle to	e heads, the dual nozzle is suitable cations. In conjunction with s, it enables users to treat two pray at an angle, e.g. to treat to reach awkward places. Each ivoted through approx. 270°. Ides two preinstalled hollow e plantings and two flat spray ureas. The set also contains dummy be closed off. Using the knurled attached to existing spray wands			-	•	-	•	•	•	•	441:
1	- 10	2	3	9	4		1		5		•		6



Sets of seals for pressure and backpack sprayers

•	Recomme	•	Suitable	•		Not reco	ommen	ded	-	Unsuitable / does not fit					
Pos.	Designation	Description a	and rec	ommended application	Pa	art no.		403 404	408 409 453	401 402	461 462	456 457 458	424 425 435	473 D 475	416 Li 417 441
1	Standard set of seals	Contains all st models 461 ar		seals for SOLO pressure sprayer	4	9551		-	-	-	•	-	-	-	-
2	Standard set of seals	Contains all st models 456, 4		seals for SOLO pressure sprayer 458.	4	9441		-	-	-	-	•	-	-	-
3	Standard set of seals	Contains all st models 425 ar	tandaro nd 435	l seals for SOLO backpack sprayer with piston pump.	4	9442		-	-	-	-	-	•	-	-
4	FKM set of seals	456, 457 and	l 458. N iton®").	OLO pressure sprayer models lade from highly resistant FKM Standard equipment level for 456 Pro.	4	9577		-	•		•	•	-	-	
5	FKM set of seals	425 and 435 resistant FKN	with pi // mater rel for al	OLO backpack sprayer models ston pump. Made from highly ial ("Viton®"). Standard SOLO backpack sprayer models ir ategories.		9578		-	-	-	-	-	•	-	-
6	Standard set of seals	models 475 ar	nd 473 p diaph	seals for SOLO backpack sprayer D Classic with diaphragm pump agms made from special, highly iterial (TPV).		9443		-	-	-	-	-	-	•	-
7	FKM set of seals	and 473 D Cla highly resista diaphragms ma	assic w ant FKN ade fror dard equ	OLO backpack sprayer models 47: ith diaphragm pump. Made fror material ("Viton®"). Including n special, highly resistant Tivilon ipment level for SOLO 475 Comfor	n ®	9579		-	-	-	-	-	-	•	-



Other accessories

Designation Manual valve set Pressure gauge	Professional mar made from special and connection for Including all parts We recommend th highly accurate r with permanent readable display (0 - 90 psi) in 0.2 pressure gauge a handling, it is equ	plastic material. Wir installing a pressur necessary for install e professional pre- neasurements and spray pressure cor range extends fro bar increments. To	ergonomic design th childproof lock e gauge (optional). ation. ssure gauge for readings, used	Part no. 49440 49356		403 404	408 409 453	401 402	461 462	456 457 458	424 425 435	473 D 475	416 Li 417 441
	made from special and connection for Including all parts We recommend the highly accurate rewith permanent readable display (0 - 90 psi) in 0.2 pressure gauge a handling, it is equ	plastic material. Wir installing a pressur necessary for install e professional pre- neasurements and spray pressure cor range extends fro bar increments. To	th childproof lock e gauge (optional). ation. ssure gauge for readings, used			-	•	-	•	•	•	•	•
Pressure gauge	highly accurate r with permanent readable display (0 - 90 psi) in 0.2 pressure gauge a handling, it is equ	neasurements and spray pressure cor range extends fro bar increments. To	readings, used	49356									
	nuts and seal rings	uipped with a large, I The standard deliver	m 0 to 6 bar o protect the t and to ensure safe removable rubber			1	•	1	•	•	•	•	•
Ball valve filter	shut off, we recor stainless steel fil spray wands are u below the spray no Standard equipme	mmend using the ba Iter insert — especia Ised. Straightforwa ozzle, instead of the nt level for SOLO spi	olly when telescopic ord insertion standard filter. ray booms 49514	49539		1	•	-	•	•	•	•	•
Pro backpack carrying system	makes safe and till sprayers easier over with the help of ex it offers maximur distribution of wellight quality material padding and ventintegral waist beto that of a moder fits all SOLO back capacities (including properties).	reless working with er longer operating perts from the outon user comfort than eight over the shou erials, wide straps validation of the shou It ensure perfect wea h hiking rucksack. The pack sprayers with ing older models) a	49599			-			-	•1)	•	-	
Compressed air connection valve	having to pump cushion of air to b working periods spray pattern. Th connection valve air supply to be an integral, autom	manually. Allows a build up quickly and s whilst maintaining the pivoting comprese e enables an exter connected to the s natic overpressure va	49590		-	-	-	-	•	-	-	-	
Wheel set	Quick-fit, practical grip wheels incl. movement. This er	sing large, high e for easy tilting and sprayer 458 to be	49211		-	-	-	-	2)	-	-	-	
	Compressed air	below the spray no Standard equipme and 49299. Openin ISO-compliant. Pro backpack carrying system The comfortable, pi makes safe and ti sprayers easier ove with the help of ex it offers maximum distribution of wilder help for the light quality mate padding and ventintegral waist be to that of a modern fits all SOLO back capacities (includ equipment for the light quality mate padding and ventintegral waist be to that of a modern fits all SOLO back capacities (includ equipment for the light quality mate padding and ventintegral waist be to that of a modern fits all SOLO back capacities (includ equipment for the light quality mate padding and ventintegral waist be to that of a modern fits all SOLO back capacities (includ equipment for the light quality mate padding and ventintegral waist be to that of a modern fits all sollo back capacities (includ equipment for the light quality mate padding and ventintegral waist be to that of a modern fits all sollo back capacities (includ equipment for the light quality mate padding and ventintegral waist be to that of a modern fits all sollo back capacities (includ equipment for the light quality mate padding and ventintegral waist be to that of a modern fits all sollo back capacities (includ equipment for the light quality mate padding and ventintegral waist be to that of a modern fits all sollo back capacities (includ equipment for the light quality mate padding and ventintegral waist be to that of a modern fits all sollo back capacities (includ equipment for the light quality mate padding and ventintegral waist be to that of a modern fits all sollo back capacities (includ equipment for the light quality mate padding and ventintegral waist be to that of a modern fits all sollo back capacities (includ equipment for the light quality mate padding and ventintegral waist be to that of a modern fits all sollo back capacities (includ equipment for the light quality mate padding and ventintegral waist be to that of a modern fits all sollo back capacities (includ equipment for th	below the spray nozzle, instead of the Standard equipment level for SOLO sp and 49299. Opening pressure 0.3 bar. ISO-compliant. Pro backpack Carrying system The comfortable, professional backpack makes safe and tireless working with sprayers easier over longer operating with the help of experts from the oute it offers maximum user comfort that distribution of weight over the shou High quality materials, wide straps we padding and ventilation of the shou integral waist belt ensure perfect weat to that of a modern hiking rucksack. The fits all SOLO backpack sprayers with capacities (including older models) are equipment for the latest SOLO PRO back equipment for the latest SOLO PRO back having to pump manually. Allows a cushion of air to build up quickly and working periods whilst maintaining spray pattern. The pivoting compressive sprayer models 456, 457 and wheel set. Quick-fit, practical wheel set, compring the pressure sprayer models 456, 457 and wheel set.	below the spray nozzle, instead of the standard filter. Standard equipment level for SOLO spray booms 49514 and 49299. Opening pressure 0.3 bar. Mesh size 50 mesh, ISO-compliant. Pro backpack carrying system The comfortable, professional backpack carrying system makes safe and tireless working with SOLO backpack sprayers easier over longer operating periods. Developed with the help of experts from the outdoor sports sector, it offers maximum user comfort thanks to the balanced distribution of weight over the shoulders and hips. High quality materials, wide straps with comfortable padding and ventilation of the shoulder straps and integral waist belt ensure perfect wearing comfort, akin to that of a modern hiking rucksack. The carrying system fits all SOLO backpack sprayers with 12 I and 15 I tank capacities (including older models) and is standard equipment for the latest SOLO PRO backpack sprayer models. Compressed air connection valve Automatic, rapid build-up of pressure saves you having to pump manually. Allows a large pressurised cushion of air to build up quickly and easily for longer working periods whilst maintaining a professional spray pattern. The pivoting compressed air connection valve enables an external compressed air supply to be connected to the sprayer and has an integral, automatic overpressure valve. It fits SOLO pressure sprayer models 456, 457 and 458.	below the spray nozzle, instead of the standard filter. Standard equipment level for SOLO spray booms 49514 and 49299. Opening pressure 0.3 bar. Mesh size 50 mesh, ISO-compliant. The comfortable, professional backpack carrying system makes safe and tireless working with SOLO backpack sprayers easier over longer operating periods. Developed with the help of experts from the outdoor sports sector, it offers maximum user comfort thanks to the balanced distribution of weight over the shoulders and hips. High quality materials, wide straps with comfortable padding and ventilation of the shoulder straps and integral waist belt ensure perfect wearing comfort, akin to that of a modern hiking rucksack. The carrying system fits all SOLO backpack sprayers with 12 I and 15 I tank capacities (including older models) and is standard equipment for the latest SOLO PRO backpack sprayer models. Compressed air connection valve Automatic, rapid build-up of pressure saves you having to pump manually. Allows a large pressurised cushion of air to build up quickly and easily for longer working periods whilst maintaining a professional spray pattern. The pivoting compressed air connection valve enables an external compressed air supply to be connected to the sprayer and has an integral, automatic overpressure valve. It fits SOLO pressure sprayer models 456, 457 and 458. Wheel set Quick-fit, practical wheel set, comprising large, high grip wheels incl. axle and a handle for easy tilting and movement. This enables the pressure sprayer 458 to be	below the spray nozzle, instead of the standard filter. Standard equipment level for SOLO spray booms 49514 and 49299. Opening pressure 0.3 bar. Mesh size 50 mesh, ISO-compliant. Pro backpack Carrying system The comfortable, professional backpack carrying system makes safe and tireless working with SOLO backpack sprayers easier over longer operating periods. Developed with the help of experts from the outdoor sports sector, it offers maximum user comfort thanks to the balanced distribution of weight over the shoulders and hips. High quality materials, wide straps with comfortable padding and ventilation of the shoulder straps and integral waist belt ensure perfect wearing comfort, akin to that of a modern hiking rucksack. The carrying system fits all SOLO backpack sprayers with 12 I and 15 I tank capacities (including older models) and is standard equipment for the latest SOLO PRO backpack sprayer models. Compressed air connection valve Automatic, rapid build-up of pressure saves you having to pump manually. Allows a large pressurised cushion of air to build up quickly and easily for longer working periods whilst maintaining a professional spray pattern. The pivoting compressed air connection valve enables an external compressed air supply to be connected to the sprayer and has an integral, automatic overpressure valve. It fits SOLO pressure sprayer models 456, 457 and 458. Wheel set Quick-fit, practical wheel set, comprising large, high grip wheels incl. axle and a handle for easy tilting and movement. This enables the pressure sprayer 458 to be	below the spray nozzle, instead of the standard filter. Standard equipment level for SOLO spray booms 49514 and 49299. Opening pressure 0.3 bar. Mesh size 50 mesh, ISO-compliant. Pro backpack carrying system The comfortable, professional backpack carrying system makes safe and tireless working with SOLO backpack sprayers easier over longer operating periods. Developed with the help of experts from the outdoor sports sector, it offers maximum user comfort thanks to the balanced distribution of weight over the shoulders and hips. High quality materials, wide straps with comfortable padding and ventilation of the shoulder straps and integral waist belt ensure perfect wearing comfort, akin to that of a modern hiking rucksack. The carrying system fits all SOLO backpack sprayers with 12 I and 15 I tank capacities (including older models) and is standard equipment for the latest SOLO PRO backpack sprayer models. Compressed air connection valve Automatic, rapid build-up of pressure saves you having to pump manually. Allows a large pressurised cushion of air to build up quickly and easily for longer working periods whilst maintaining a professional spray pattern. The pivoting compressed air connection valve enables an external compressed air supply to be connected to the sprayer and has an integral, automatic overpressure valve. It fits SOLO pressure sprayer models 456, 457 and 458. Wheel set Quick-fit, practical wheel set, comprising large, high grip wheels incl. axle and a handle for easy tilting and movement. This enables the pressure sprayer 458 to be	below the spray nozzle, instead of the standard filter. Standard equipment level for SOLO spray booms 49514 and 49299. Opening pressure 0.3 bar. Mesh size 50 mesh, ISO-compliant. Pro backpack Carrying system The comfortable, professional backpack carrying system makes safe and tireless working with SOLO backpack sprayers easier over longer operating periods. Developed with the help of experts from the outdoor sports sector, it offers maximum user comfort thanks to the balanced distribution of weight over the shoulders and hips. High quality materials, wide straps with comfortable padding and ventilation of the shoulder straps and integral waist belt ensure perfect wearing comfort, akin to that of a modern hiking rucksack. The carrying system fits all SOLO backpack sprayers with 12 I and 15 I tank capacities (including older models) and is standard equipment for the latest SOLO PRO backpack sprayer models. Compressed air connection valve Automatic, rapid build-up of pressure saves you having to pump manually. Allows a large pressurised cushion of air to build up quickly and easily for longer working periods whilst maintaining a professional spray pattern. The pivoting compressed air connection valve enables an external compressed air supply to be connected to the sprayer and has an integral, automatic overpressure valve. It fits SOLO pressure sprayer models 456, 457 and 458. Wheel set Quick-fit, practical wheel set, comprising large, high grip wheels incl. axle and a handle for easy tilting and movement. This enables the pressure sprayer 458 to be	below the spray nozzle, instead of the standard filter. Standard equipment level for SOLO spray booms 49514 and 49299. Opening pressure 0.3 bar. Mesh size 50 mesh, ISO-compliant. Pro backpack Carrying system The comfortable, professional backpack carrying system makes safe and tirreless working with SOLO backpack sprayers easier over longer operating periods. Developed with the help of experts from the outdoor sports sector, it offers maximum user comfort thanks to the balanced distribution of weight over the shoulders and hips. High quality materials, wide straps with comfortable padding and ventilation of the shoulder straps and integral waist belt ensure perfect wearing comfort, akin to that of a modern hiking rucksack. The carrying system fits all SOLO backpack sprayers with 12 I and 15 I tank capacities (including older models) and is standard equipment for the latest SOLO PRO backpack sprayer models. Compressed air connection valve Automatic, rapid build-up of pressure saves you having to pump manually. Allows a large pressurised cushion of air to build up quickly and easily for longer working periods whilst maintaining a professional spray pattern. The pivoting compressed air connection valve enables an external compressed air supply to be connected to the sprayer and has an integral, automatic overpressure valve. It fits SOLO pressure sprayer models 456, 457 and 458. Wheel set Quick-fit, practical wheel set, comprising large, high grip wheels incl. axle and a handle for easy tilting and movement. This enables the pressure sprayer 458 to be	below the spray nozzle, instead of the standard filter. Standard equipment level for SOLO spray booms 49514 and 49299. Opening pressure 0.3 bar. Mesh size 50 mesh, ISO-compliant. The comfortable, professional backpack carrying system makes safe and tireless working with SOLO backpack sprayers easier over longer operating periods. Developed with the help of experts from the outdoor sports sector, it offers maximum user comfort thanks to the balanced distribution of weight over the shoulders and hips. High quality materials, wide straps with comfortable padding and ventilation of the shoulder straps and integral waist belt ensure perfect wearing comfort, akin to that of a modern hiking rucksack. The carrying system fits all SOLO backpack sprayers with 12 I and 15 I tank capacities (including older models) and is standard equipment for the latest SOLO PRO backpack sprayer models. Compressed air connection valve Automatic, rapid build-up of pressure saves you having to pump manually. Allows a large pressurised cushion of air to build up quickly and easily for longer working periods whilst maintaining a professional spray pattern. The pivoting compressed air connection valve enables an external compressed air supply to be connected to the sprayer and has an integral, automatic overpressure valve. It fits SOLO pressure sprayer models 456, 457 and 458. Wheel set Quick-fit, practical wheel set, comprising large, high grip wheels incl. axle and a handle for easy tilting and movement. This enables the pressure sprayer 458 to be	below the spray nozzle, instead of the standard filter. Standard equipment level for SOLO spray booms 49514 and 49299. Opening pressure 0.3 bar. Mesh size 50 mesh, ISO-compliant. The comfortable, professional backpack carrying system makes safe and tireless working with SOLO backpack sprayers easier over longer operating periods. Developed with the help of experts from the outdoor sports sector, it offers maximum user comfort thanks to the balanced distribution of weight over the shoulders and hips. High quality materials, wide straps with comfortable padding and ventilation of the shoulder straps and integral waist belt ensure perfect wearing comfort, akin to that of a modern hiking rucksack. The carrying system fits all SOLO backpack sprayers with 12 I and 15 I tank capacities (including older models) and is standard equipment for the latest SOLO PRO backpack sprayer models. Compressed air connection valve Automatic, rapid build-up of pressure saves you having to pump manually. Allows a large pressurised cushion of air to build up quickly and easily for longer working periods whilst maintaining a professional spray pattern. The pivoting compressed air connection valve enables an external compressed air supply to be connected to the sprayer and has an integral, automatic overpressure valve. It fits SOLO pressure sprayer models 456, 457 and 458. Wheel set Quick-fit, practical wheel set, comprising large, high grip wheels incl. axle and a handle for easy tilting and movement. This enables the pressure sprayer 458 to be	below the spray nozzle, instead of the standard filter. Standard equipment level for SOLO spray booms 49514 and 49299. Opening pressure 0.3 bar. Mesh size 50 mesh, ISO-compliant. The comfortable, professional backpack carrying system makes safe and tireless working with SOLO backpack sprayers easier over longer operating periods. Developed with the help of experts from the outdoor sports sector, it offers maximum user comfort thanks to the balanced distribution of weight over the shoulders and hips. High quality materials, wide straps with comfortable padding and ventilation of the shoulder straps and integral waist belt ensure perfect wearing comfort, akin to that of a modern hiking rucksack. The carrying system fits all SOLO backpack sprayers with 12 I and 13 I tank capacities (including older models) and is standard equipment for the latest SOLO PRO backpack sprayer models. Compressed air connection valve Automatic, rapid build-up of pressure saves you having to pump manually. Allows a large pressurised cushion of air to build up quickly and easily for longer working periods whilst maintaining a professional spray pattern. The pivoting compressed air connection valve enables an external compressed air supply to be connected to the sprayer and has an integral, automatic overpressure valve. It fits SOLO pressure sprayer models 456, 457 and 458. Wheel set Quick-fit, practical wheel set, comprising large, high grip wheels incl. axle and a handle for easy tilting and movement. This enables the pressure sprayer 458 to be	below the spray nozzle, instead of the standard filter. Standard equipment level for SOLO spray booms 49514 and 49299. Opening pressure 0.3 bar. Mesh size 50 mesh, ISO-compliant. The comfortable, professional backpack carrying system makes safe and tireless working with SOLO backpack sprayers easier over longer operating periods. Developed with the help of experts from the outdoor sports sector, it offers maximum user comfort thanks to the balanced distribution of weight over the shoulders and hips. High quality materials, wide straps with comfortable padding and ventilation of the shoulder straps and integral waist belt ensure perfect wearing comfort, akin to that of a modern hiking rucksack. The carrying system fits all SOLO backpack sprayers with 12 I and 15 I tank capacities (including older models) and is standard equipment for the latest SOLO PRO backpack sprayer models. Compressed air connection valve Automatic, rapid build-up of pressure saves you having to pump manually. Allows a large pressurised cushion of air to build up quickly and easily for longer working periods whilst maintaining a professional spray pattern. The pivoting compressed air connection valve enables an external compressed air supply to be connected to the sprayer and has an integral, automatic overpressure valve. It fits SOLO pressure sprayer models 456, 457 and 458. Wheel set Quick-fit, practical wheel set, comprising large, high grip wheels incl. axle and a handle for easy tilting and movement. This enables the pressure sprayer 458 to be




Accessories for backpack power sprayers

•	Recommended		•	Suitable	•	Not recommended	-	Unsuita	ble / does not fit
os.	Designation	Des	crip	otion			Part	t no.	433
1	Extension wand, 120 cm stainless steel	that ensu atta	rec ure s iche	ommend the 120 cm extension wand m quire a considerably extended reach safe handling, it is equipped with an ea d to the existing manual valve. Can als rd stainless steel spray wand from t	n, e.g nsy g o be	g. for very tall espaliered trees. To grip plastic sleeve and can be simply used in combination with the		183	•
2	Spray wand, 120 cm with shut-off tap and stainless steel changeover nozzle	and also e.g. excl read turn a sh	is s reco spra hang ch ca ing t nort ater	versal spray wand made from stainless st suitable for all professional assignment ommend this wand for high precision staying trees in orchards and horticulture ge of standard spray wand and manural be adjusted using the rotating selected the selector changes the spray pattern from the reach and fine droplets, to a narrow reach. Including handle and two changes, the spray wand can be used for cleaning	nts t pray iral a al va or at om th full d	hat require an extended reach. We ing and single plant treatment, applications. Straightforward alve. Flow rate, spray pattern and the handheld end of the spray wand: he initial broad hollow cone with cone and then to a full jet with a rozzles in different sizes. At higher	491	85	•
3	Telescopic extension wand, 120 - 230 cm Stainless steel	that The the	req leng	ommend the telescopic spray wand man quire a considerably extended reach gth can be variably adjusted betwe e fixing nut made from stainless steel. to attach to the existing manual valve.	ո, e.g en 1	g. for very tall, lignified plants. I 20 and 230 cm and is locked using	491	189	•
1	Spray boom with 4 nozzles Stainless steel	of p	olan	rdy, stainless steel spray boom is suitab ts. Four preinstalled nozzles, one 75 cn uts for attachment to the existing manu	ı sta	inless steel spray wand and the	493	300	•
5	Twin nozzle Stainless steel	the mat	SOL eria	n nozzle is suitable for universal use a O 433 backpack power sprayer. The no I; the two individual preinstalled nozzle t blockages.	zzle	retainer is made from robust plastic	491	182	•
i	Extension hose 10 m with retaining bracket	– ev to r exte	ven ema	nended for all spraying applications when working at moderate heights ain on the ground. A bonus for comfon hose is 10 m long. The retaining bractind can be neatly rolled up and stored	whe ort a ket fi	ere the power sprayer itself has and safety. The robust, high pressure its the filling aperture of the SOLO 433	491	91	•



Accessories for power misters

•	Recommended	•	Suitable	•	Not recommended	-	Unsui	table / do	es not	fit
Pos.	Designation	Descrip	tion			Par	t no.		423	452
1	Dusting attachment	dusting granula such as	ting attachment allows the SOLO Port machine. This makes it possible to a Ite or powder form. The standard de the corrugated supply hose, ventilation ow with dusting metering lever.	i pply ivery	plant protection medium in includes all of the necessary parts,	492	233		•	-
2	ULV nozzle with metering device	enables applyin and sm	nozzle with metering device for the SC conversion to misting using the UL g very high concentrations of spray all droplets. All the necessary parts, so plastic and the metering device are incl	494	179		•	•		
3	Twin nozzle	and enl separate 90° wit while m jet to c for exan attachm	e aid of the twin nozzle, the spray pat larged. The amount of spray liquid supely. The angle between the two misting hout using tools, i.e. the spray patter isting. This makes it suitable for very wompletely separating it to be ableable mple when treating two rows at the lents enlarge the jets, which can be being, for example.	491	137		•	•		
4	Extension wand	extendo a SOLO	ne 60 cm extension wand, the jet can ed, which is helpful when spraying liquid booster pump (accessory) is high on wand, in order to ensure a reliable s y.	targ	ets some distance away. The use of commended in conjunction with the	493	333		•	•
5	Liquid booster pump	planting reach. I	mmend using the liquid booster pump is that predominantly require an up t enables a reliable supply of spray liqu ttension wand 49333.	ward	spray direction or a greater	491	117		•	•

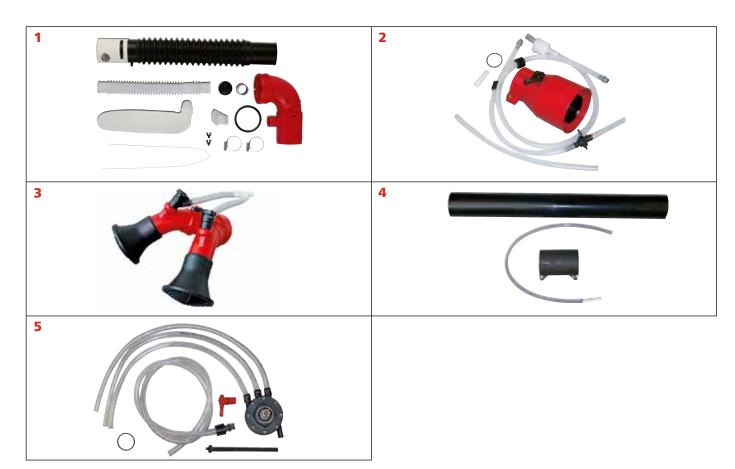

Engine oils, special maintenance agents and accessories

•	Recommended	• Suitable •	Not recomm	mended	-	Unsuita	able / do	oes not	fit
	Designation	Description		Part no.		433	423	452	468
1	SOLO Profi 2T engine oil 100 ml (for 5 l of two-stroke fuel mixture)	Semi-synthetic universal engine oil with fuel Contains cleaning and corrosion-inhibiting a for mixture lubrication and separate lubricat water-cooled two-stroke engines. The dissol	dditives. Suitable tion of all air and ving agents it	49103		-	•	•	•
2	SOLO Profi 2T engine oil 1 I (for 50 l of two-stroke fuel mixture)	contains ensure automatic and even mixing - Prevents the fuel mixture ageing - Enables trouble-free engine start even after star periods - Protects against correction		49104		-	•	•	•
3	SOLO Profi 2T engine oil, metering bottle, 1 I (for 50 I of two-stroke fuel mixture – easy to meter)	- Keeps the fuel system clean - Excellent ignition capability 2 years; even lor grade fuel is used Specifications: JASO FD, ISO-L-EGD, APITC, GLOB	- Excellent ignition capability 2 years; even longer when high						
4	Mixing container 1 l	Practical, compact mixing container for top without spills or drips, and practical mixing mixture (petrol/oil). Including funnel and m The funnel makes it easier to fill the tank, even narrow filler necks. Hard to lose: when not in the inserted into the mixing container and held is screw cap. The cap can also help to achieve an 2-stroke fuel: 1 cap full of two-stroke oil to 1 low mixing ratio of 1:50.	g of 2-stroke fuel neasuring cap. in the case of use, the funnel can in place with the naccurate ratio for	49278		-	•	•	•



German quality worldwide



SOLO Kleinmotoren GmbH was founded in Stuttgart in 1948 and to this day is still a leading global manufacturer of high grade sprayers and misters, blowers and cut-off machines — all featuring the high German quality standards you have come to expect from us.

In addition to our head office in the south German town of Sindelfingen, we have partners and subsidiaries around the world, ensuring we meet our customers' requirements. Quality and proximity to customers are the reasons why SOLO products are used in almost every country in the world.

Are you looking for sprayers or foam sprayers specially designed for cleaning? Request our new **CLEANLine** brochure and ask your local SOLO partner.

We are happy to advise you:





THE BETTER CHOICE. SINCE 1948.German quality sprayers and cut-off machines

SOLO Kleinmotoren GmbH Postfach 60 01 52 D-71050 Sindelfingen Telephone + 49 70 31 / 301 - 0 Fax + 49 70 31 / 301 - 149 Email: info@solo-germany.com www.solo.global

Subject to technical modifications.

70 220 1/2020

